Well Sites Survey

(1994-2014)

Arnold, Broad Creek and Crofton Meadows Well Fields in Anne Arundel County Maryland

Report date: October 9, 2014

Report prepared by:

Daniel C. Sain Maryland State Highway Administration Plats and Surveys Division

Abstract	3
Purpose	3
History	3
Monumentation	3
Specifications	3
Equipment used	4
Conditions effecting surveys	4
Vector reduction	4
Adjustment	4
2013 Observation Schedule	8
Figure 1 - ARNOLD-1 values with uncertainties	6
Figure 2 - BROAD-1 values with uncertainties	6
Figure 3 - CROFTON-1 values with uncertainties	7
Table 1 - Sites used in survey	3
Table 2 - CORS site equipment	4
Table 3 - Fixed station coordinate	4
Table 4 - Heights determined by GPS (all values shown as meters)	5
Table 5 - NAVD 88 heights derived from different techniques	7
Table 6 - Geoid Heights for project monuments	7

Report of GPS Surveys

Abstract

This report describes the most recent year of surveys performed by the Maryland State Highway Administration (MDSHA), Division of Plats and Surveys, for the Maryland Geological Survey (MGS).

The survey was part of efforts by the MGS to monitor for changes at three well sites in Anne Arundel County. Height differences were measured using the Global Positioning System (GPS).

This report describes the results of the current survey.

Purpose

The goal of this survey is to monitor one survey monument at three separate well sites in Anne Arundel County.

History

This survey was undertaken as part of an effort begun in 1994 to determine the relationship of the well sites to a monument in the stable Piedmont region of the state as well as to sites in the National Geodetic Survey's Continuously Operating Reference Station (CORS) network.

Measurements were made on 25, 26, 27, and 28 August 2014 using GPS.

Station	Site Name	Nearby Community
GORF GPS N	Howard High School	Columbia, MD
ARNOLD-1	Arnold Well Field	Arnold, MD
BROAD-1	Broad Creek Well Field	Annapolis, MD
CROFTON-1	Crofton Meadows Well Field	Crofton, MD
ANP5	Annapolis CORS site	Annapolis, MD
GODE	NASA Goddard CORS	Greenbelt, MD
USNO	US Naval Observatory CORS	Washington, DC

Table 1 - Sites used in survey

Monumentation

No new survey monuments were established in 2014.

Specifications

Observations at well sites consisted of five and one-half hour sessions on three separate days. One session was offset from the others by four (4) hours. The offset session uses a different satellite constellation and thereby provides an accuracy check.

Equipment used

Four MDSHA GPS\GNSS receivers were used during this project. They are Topcon GR-5 units capable of logging multiple frequencies (L1 and L2) and multiple constellations (GPS and GLONASS). NGS antenna calibrations are available for the antennas.

Site	Receiver	Antenna
ANP5	TRIMBLE NET-RS	TRM41429
GODE	ASHTECH UZ-12	AOAD/M_T
USNO	ASHTECH ZXII3T	AOAD/M_T

Table 2 - CORS site equipment

Conditions effecting surveys

There were a few conditions that changed this year. They are:

The schedule this year was impacted due to the processing of the Cost Sharing Agreement paperwork, personnel issues, and also due to the implementation of a new system in SHA to process the approval of the Cost Sharing Agreement. We were unable to get the GPS occupations done during May as was intended.

New equipment was used this year as described in the "Equipment Used" section.

The condition of the site ARN-1 was restored to grass. The gravel has been removed and it is not longer being used for construction or parking.

There was an issue with the occupation on the Broad Creek site during the August 27 session. The tip of the fixed height tripod had slipped off of the marker sometime during the session. It was decided that an additional session would be done in order to get 3 full sessions of GPS data. The session from August 27 was excluded from the data reduction.

Vector reduction

GPS observations were initially reduced to vectors using the Topcon Tools software package (version 8.2.3). The position of station GORF GPS N was verified by observations with respect to three NGS CORS sites.

Adjustment

The GPS vectors were then adjusted with the Topcon Tools software package (version 8.2.3). Adjusted coordinates for the well site stations were determined with respect to the NAD 83 (1991) coordinates and NAVD 88 height for station GORF GPS N. As the primary interest is the vertical component, these values were extracted from the adjustment and tabulated below.

Table 3 - Fixed station coordinate

Station Name	Latitude	Longitude	NAVD 88 height	Datum
GORF GPS N	N39 13 34.24168	W076 48 50.46404	156.886	NAD 83 (1991)

Geoid heights were determined for well site stations using the model GEOID 2003. These values are used to convert ellipsoid heights derived from GPS observations into NAVD 88 compatible values.


YEAR	ARNOLD-1	sigma	BROAD-1	sigma	CROFTON-1	sigma
1994	38.223	0.036	28.282	0.057	41.180	0.086
1995	38.224	0.023	28.303	0.021	41.212	0.017
1996	38.216	0.009	28.306	0.010	41.243	0.009
1997	38.219	0.029	28.309	0.024	41.233	0.017
1998	38.208	0.005	28.304	0.005	41.233	0.005
1999	38.201	0.025	28.323	0.025	41.240	0.025
2000	38.210	0.012	28.318	0.012	41.246	0.012
2001	38.221	0.006	28.322	0.007	41.247	0.006
2002	38.203	0.012	28.289	0.012	41.223	0.012
2003	38.197	0.032	28.289	0.019	41.200	0.019
2004	38.205	0.007	28.293	0.007	41.203	0.007
2005	38.184	0.009	28.288	0.011	41.206	0.008
2006	38.186	0.009	28.296	0.009	41.211	0.006
2007	38.180	0.014	28.281	0.015	41.206	0.011
2008	38.181	0.021	28.272	0.021	41.204	0.016
2009	38.184	0.020	28.293	0.019	41.224	0.015
2010	38.176	0.012	28.286	0.012	41.222	0.009
2011	38.194	0.024	28.295	0.025	41.227	0.027
2012	38.182	0.012	28.292	0.012	41.212	0.009
2013	38.163	0.007	28.294	0.007	41.211	0.007
2014	38.174	0.007	28.286	0.007	41.207	0.006
mean	38.197		28.296		41.219	
max	38.224		28.323		41.247	
min	38.163		28.272		41.180	
range	0.061		0.051		0.067	

Table 4 - Heights determined by GPS (all values shown as meters)


Note: The data from the January 2006 observations are listed in the following charts under the year 2005 since there were no observations in 2005 and there were two sets in 2006. There cannot be two sets of data for one year due to the format of the charts.


Note: The NAVD 88 height data, determined by precise leveling in 1994 and seen in table 5, has been added to the charts in figures 1 through 3 to allow a graphical comparison between GPS values and the original leveled heights.

Figure 1 - ARNOLD-1 values and uncertainties

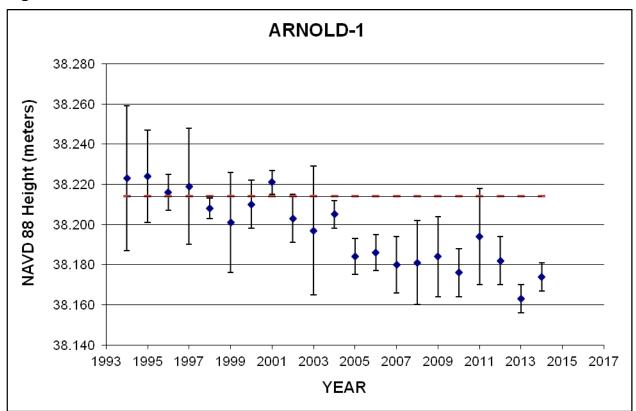



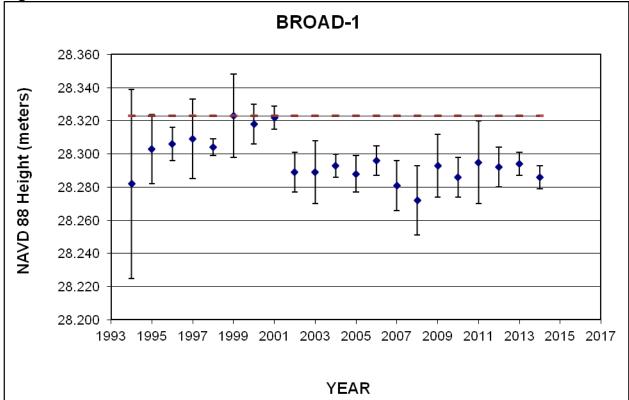



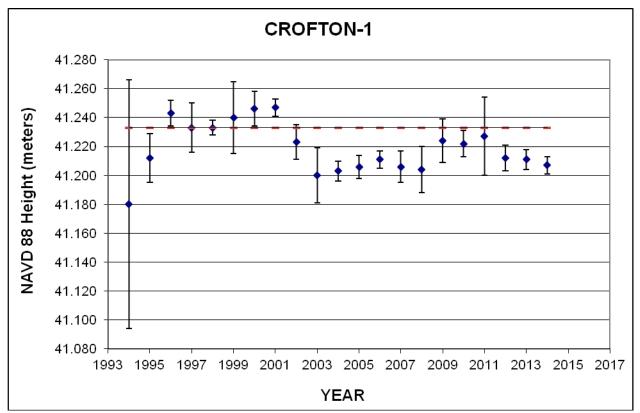


Table 5 - NAVD 88 heights in meters derived from different techniques.

Station	Leveling 1994(L)	GPS-derived 2014(G)	Difference (L-G)
ARNOLD-1	38.214	38.174	+0.04
BROAD-1	28.323	28.286	+0.037
CROFTON-1	41.233	41.207	+0.026

The discrepancy between the height determinations could be due to deficiencies in the geoid model, limitations of GPS as a system for determining heights and possible errors in the network of benchmarks.

Table 6 - Geoid Heights for project monuments

Station	Geoid 2003 Height (meters)
ARNOLD-1	-33.208
BROAD-1	-33.140
CROFTON-1	-32.791
GORF GPS N	-32.212

2013 Observation Schedule

All monuments were occupied for a minimum of 5.5 hours. CORS operate continuously (24/7).

Station	Start time	End time
	UTC	UTC
ARNOLD-1	15:39	21:00
BROAD-1	15:13	21:00
CROFTON-1	15:30	21:00
GORF GPS N	15:25	21:03
Annapolis CORS site	00:00	23:59
NASA Goddard CORS	00:00	23:59
US Naval Observatory CORS	00:00	23:59

DOY: 238 Date: 26 August 2014

Station	Start time UTC	End time UTC
ARNOLD-1	11:13	17:01
BROAD-1	11:13	17:01
CROFTON-1	11:25	17:01
GORF GPS N	11:25	17:03
Annapolis CORS site	00:00	23:59
NASA Goddard CORS	00:00	23:59
US Naval Observatory CORS	00:00	23:59

DOY: 239 Date: 27 August 2014

Station	Start time UTC	End time UTC
ARNOLD-1	11:21	17:00
BROAD-1	11:25	17:01
CROFTON-1	11:23	17:04
GORF GPS N	11:28	17:02
Annapolis CORS site	00:00	23:59
NASA Goddard CORS	00:00	23:59
US Naval Observatory CORS	00:00	23:59

DOY: 240 Date: 28 August 2014

Station	Start time UTC	End time UTC
ARNOLD-1	11:17	17:00
BROAD-1	11:25	17:00
CROFTON-1	11:28	17:10
GORF GPS N	11:22	17:02
Annapolis CORS site	00:00	23:59
NASA Goddard CORS	00:00	23:59
US Naval Observatory CORS	00:00	23:59